

CERTIFICATE OF EMC

CERTIFICATE NO.: SET2015-01558



Wu Lion





EMC TEST REPORT

Report No.: SET2015-01558

Product: Landing call and display board

Model No: BL2000-HAH-M* (*=2-2.99, indicate the different customer or/and Software function number)


Applicant: ShenYang Bluelight Automatic Technology Co., Ltd.

Address: No. 37 Shiji Road, Hunnan New District, Shenyang, China

Issued by: CCIC Southern Electronic Product Testing (Shenzhen)CO., Ltd.

Lab location: Building 28/29, Shigudong, Xili Industrial Area, Xili Street, Nanshan District, Shenzhen, Guangdong, China

Tel: 86 755 26627338 **Fax** 86 755 26627238

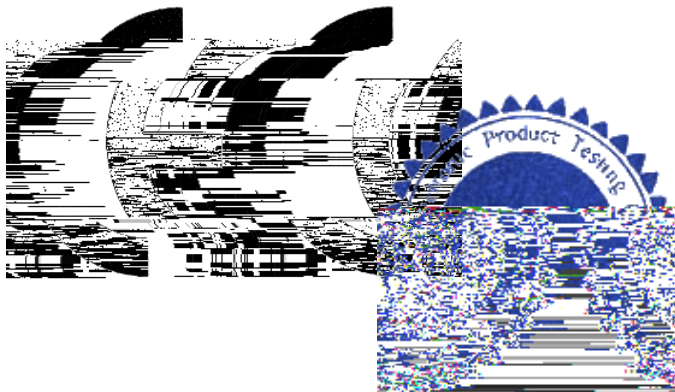

This test report consists of 23 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

查询码: 6PA7ZR5b






Table of Contents

Report.....	2
1 General Information.....	5
1.1 Description of EUT	5
1.2 Objective	5
2 Test Facilities and Configuration	
2.1 Environmental Conditions	
2.2 Measurement Uncertainty	
2.3 Test Standards and Results	
2.4 List of Equipments Used.....	7
3 Emission Test	8
3.1 EUT Setup and Operating Conditions.....	8
3.2 Radiated Disturbance Measurement	8
3.2.1 Limits of Radiated Disturbance	8
3.2.2 Test Setup	8
3.2.3 Test Result	9
4 Immunity Test	11
4.1 EUT Setup and Operating Conditions.....	11
4.2 Performance Criteria	11
4.3 Electrostatic Discharge Immunity Test	11
4.3.1 Test Specification	11
4.3.2 Test Setup	12
4.3.3 Test Result	12
4.4 Radiated, Radio Frequency Electromagnetic Field Immunity Test	13
4.4.1 Test Specification	13
4.4.2 Test Setup	13
4.4.3 Test Result	14



4.5 Electrical Fast Transient/Burst Immunity Test.....	14
4.5.1 Test Specification	14
4.5.2 Test Setup	14
4.5.3 Test Result	15
4.6 Surge Immunity Test	15
4.6.1 Test Specification	15
4.6.2 Test Setup	15
4.6.3 Test Result	15
4.7 Immunity to Conducted Disturbances Induced by RF Fields	15
4.7.1 Test Specification	16
4.7.2 Test Setup	16
4.7.3 Test Result	16
4.8 Power Frequency Magnetic Field Immunity Test	17
4.8.1 Test Specification	17
4.8.2 Test Setup	17
4.8.3 Test Result	17
Appendix I Photographs of the EUT	18
Appendix II Photographs of EMC Test Configuration	19



1 General Information

1.1 Description of EUT

Product: Landing call and display board
Model No.: BL2000-HAH-M2.1
Brand Name: /
Serial No.: /
Rating: Input: 24V DC
Accessories: /




2.3 Test Standards and Results

The EUT has been tested according to the following specifications:

EMISSION		
Standard	Test Type	Result
EN61000-6-4:2007+A1:2011	Radiated disturbance	PASS
IMMUNITY (EN61000-6-2:2005)		
Basic Standard	Test Type	Result
IEC 61000-4-2	Electrostatic discharge immunity	PASS
IEC 61000-4-3	Radiated, radio frequency electromagnetic field immunity	PASS
IEC 61000-4-4	Electrical fast transient/burst immunity	PASS
IEC 61000-4-5	Surge immunity	PASS
IEC 61000-4-6	Immunity to conducted disturbances induced by RF fields	PASS
IEC 61000-4-8	Power frequency magnetic field immunity	PASS



Report No. SET2015-01558



3 Emission Test

3.1 EUT Setup and Operating Conditions

The EUT was powered by 24V DC mains. The EUT was continuously operated during the test.


3.2 Radiated Disturbance Measurement

3.2.1 Limits of Radiated Disturbance


Frequency range (MHz)	Quasi peak limits(dB μ V/m), at 10m measurement distance
30 – 230	40
230 - 1000	47

Notes:


- (1) The lower limit shall apply at the transition frequency.
- (2)



1. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Vertical

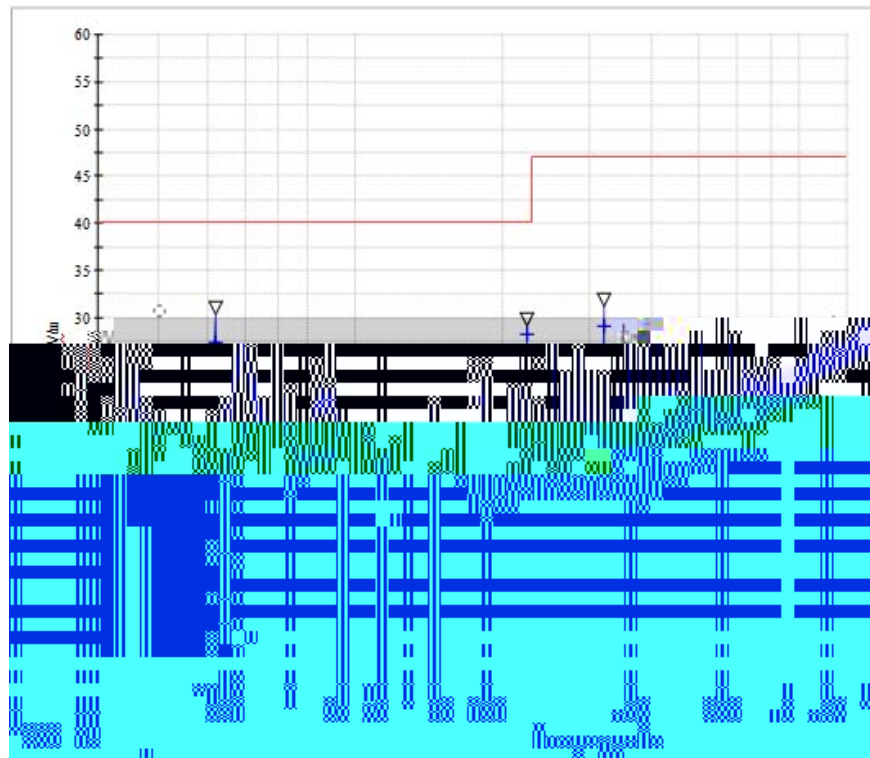

2. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Horizontal

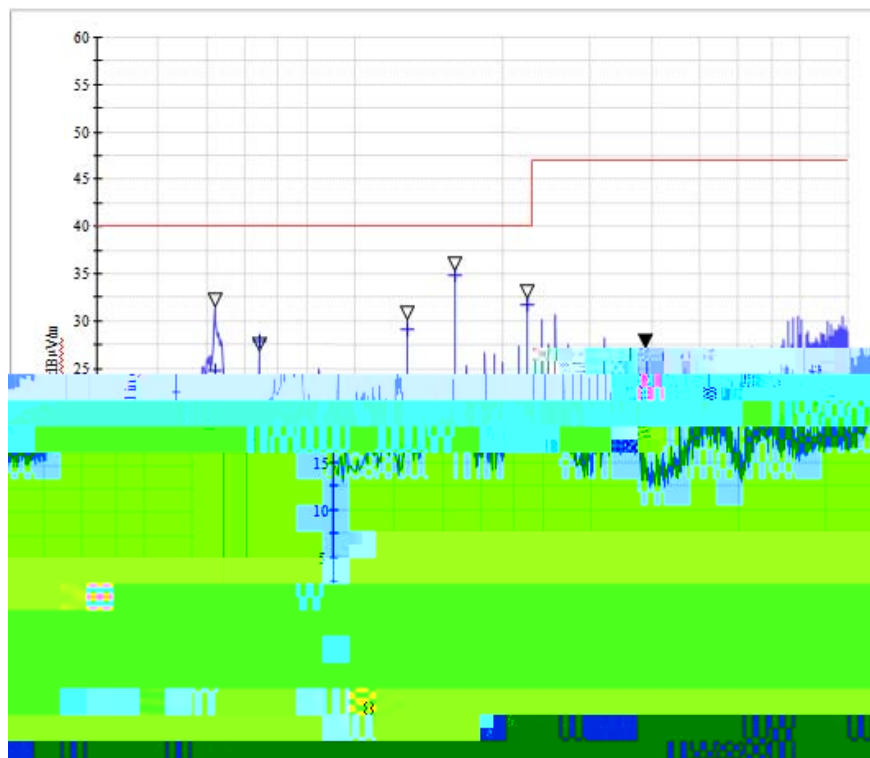

4 Immunity Test

4.1 EUT Setup and Operating Conditions

Same as 3.1.

4.2 Performance Criteria

Criterion A	The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
Criterion B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
Criterion C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.


4.3 Electrostatic Discharge Immunity Test


4.3.1 Test Specification

Basic Standard:	IEC 61000-4-2
Discharge Impedance	330 Ω / 150 pF
Discharge Voltage:	Air Discharge: 8 kV Contact Discharge: 4kV
Polarity:	Positive / Negative
Number of Discharge:	Minimum 20 times at each test point
Discharge Mode:	Single discharge
Discharge Period:	1-second minimum
Criterion:	B



Report No. SET2015-01558







4.4.3 Test Result

Frequency	Polarity	Azimuth	Field Strength (V/m)	Observation	Comply with Criterion
80-1000 MHz	V&H	0,90, 80, 270	10	Note(1)	A
1.4-2.0GHz	V&H	0,90, 80, 270	3	Note(1)	A
2.0-2.7GHz	V&H	0,90, 80, 270	1	Note(1)	A

For the actual test configuration, please refer to Appendix II Photographs of the Test Configuration.

4.5.3 Test Result

Test Point	Polarity	Test Level (kV)	Observation	Comply with Criterion
DC. power	+/-	2	Note (1)	A
Signal port	+/-	1	Note (1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.6 Surge Immunity Test

4.6.1 Test Specification

Basic Standard:	IEC 61000-4-5
Waveform:	Voltage 1.2/50 μ s; Current 8/20 μ s
Test Voltage:	DC power port: line to line 0.5 kV, line to earth 0.5 kV
Polarity:	Positive/Negative
Repetition Rate:	60sec
Times:	5 time/each condition.
Criterion:	B

4.6.2 Test Setup

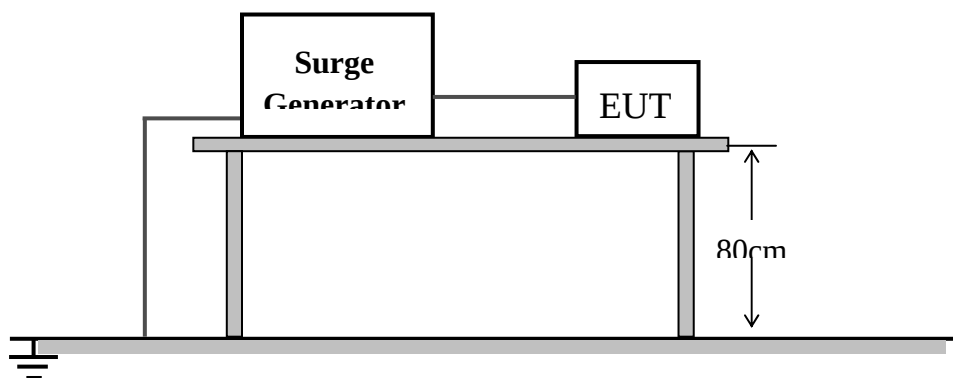

4.6.3 Test Result

Coupling Line	Polarity	Voltage (kV)	Observation	Comply with Criterion
DC power, Line-Line	+/-	0.5	Note (1)	B

NOTE:

(1). The EUT continued to operate as intended. No degradation of performance was observed.



4.7 Immunity to Conducted Disturbances Induced by RF Fields

4.7.1 Test Specification

Basic Standard:	IEC 61000-4-6
Frequency Range:	0.15 MHz – 80 MHz
Field Strength:	10V
Modulation:	1 kHz Sine Wave, 80%, AM Modulation





4.8 Power Frequency Magnetic Field Immunity Test

4.8.1 Test Specification


Basic Standard:	IEC 61000-4-8
Frequency Range:	50Hz

Appendix I Photographs of the EUT

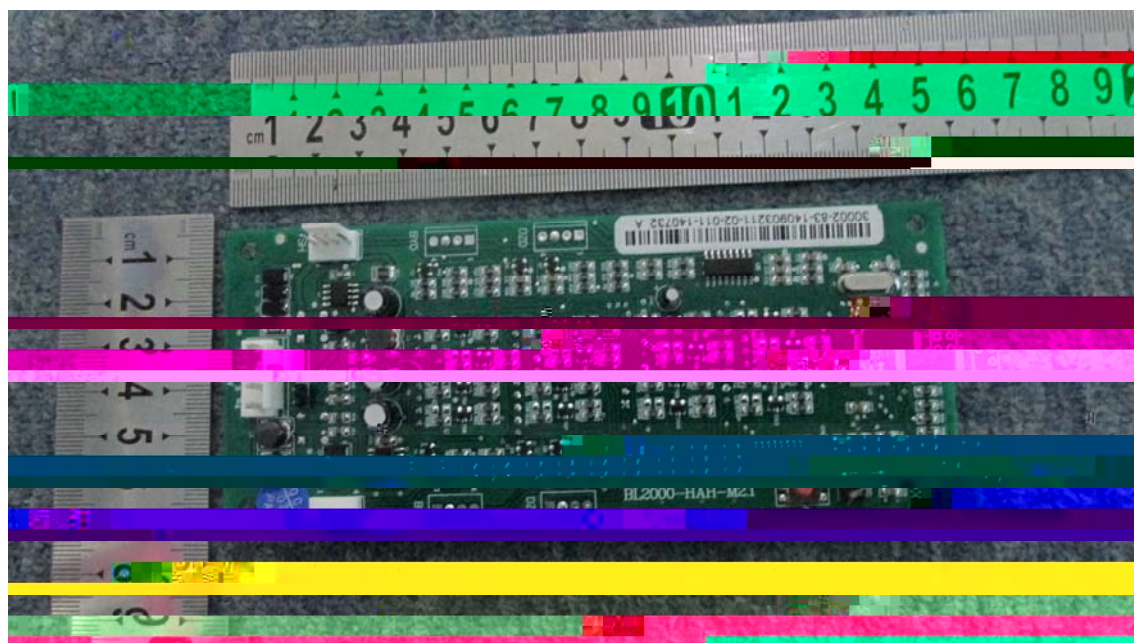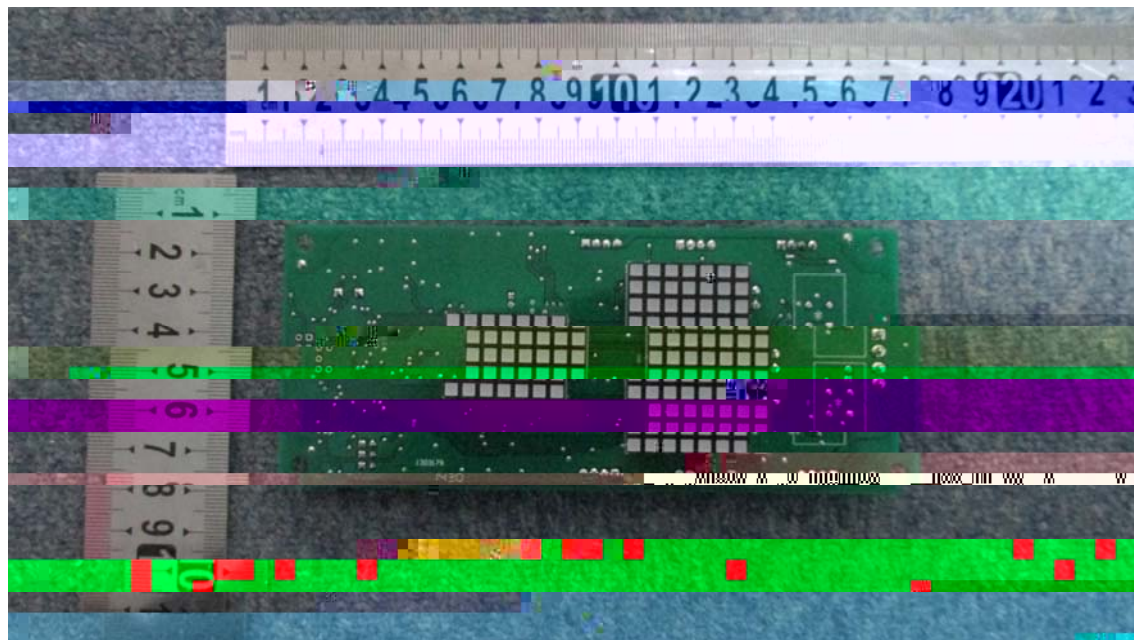


Appendix II Photographs of EMC Test Configuration

1. Radiated Field Strength Measurement

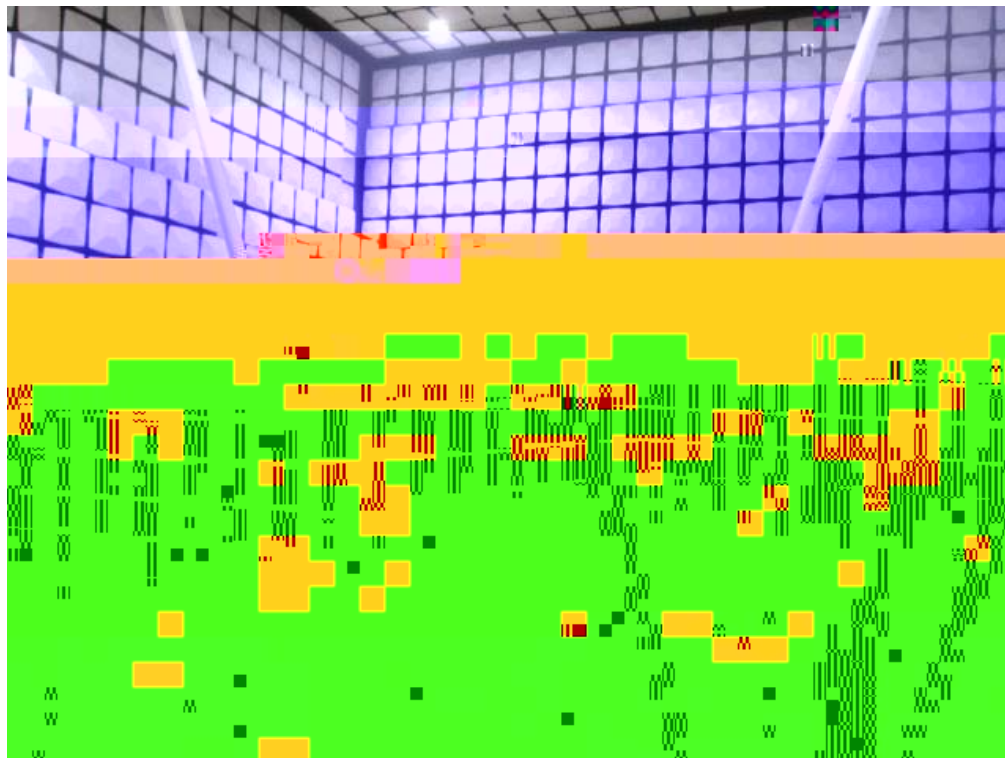


2. Electrostatic Discharge Immunity Test

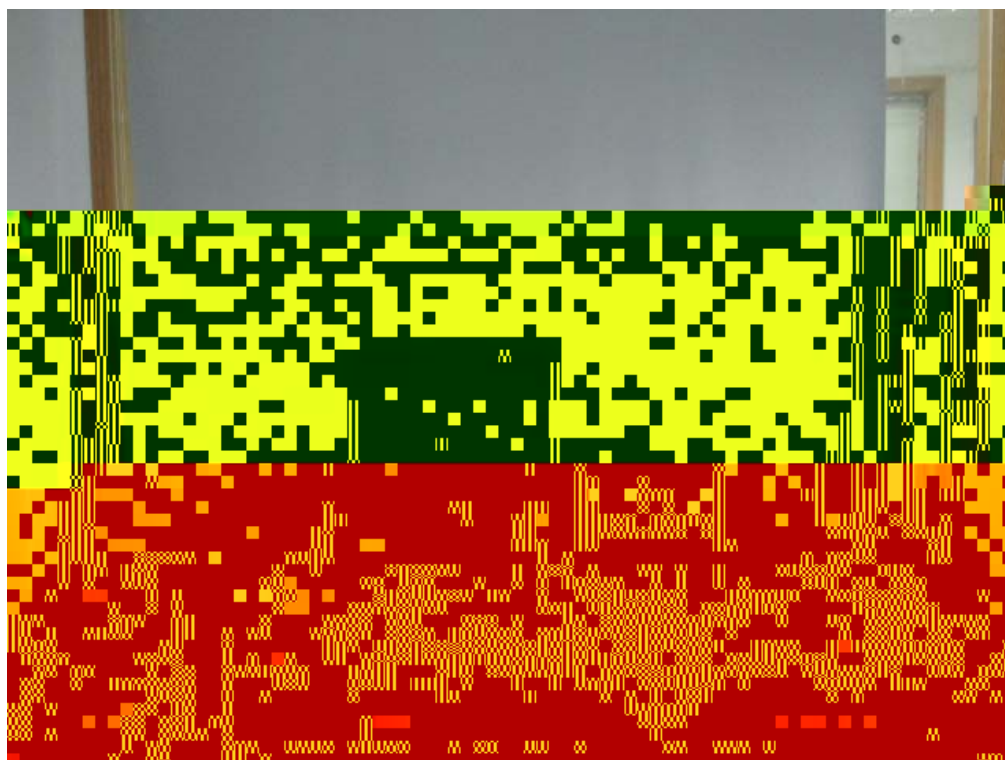


3. Radiated, Radio Frequency Electromagnetic Field Immunity Test (below 1GHz)




4. Radiated, Radio Frequency Electromagnetic Field Immunity Test (above 1GHz)

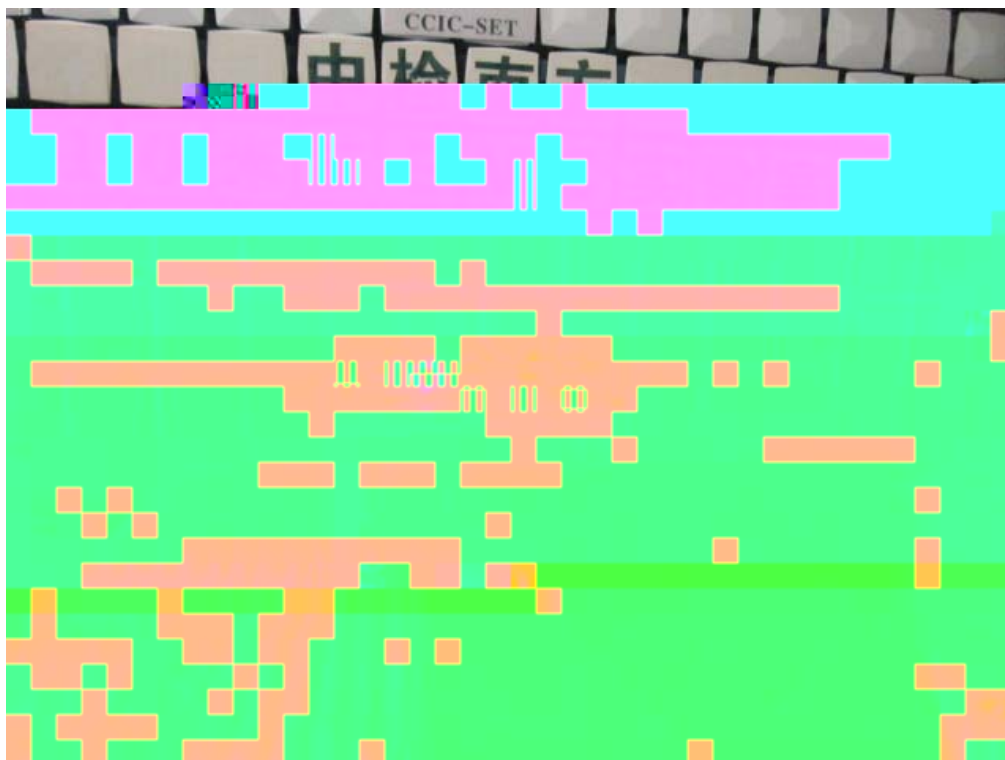

5. Electrical Fast Transient/Burst Immunity Test

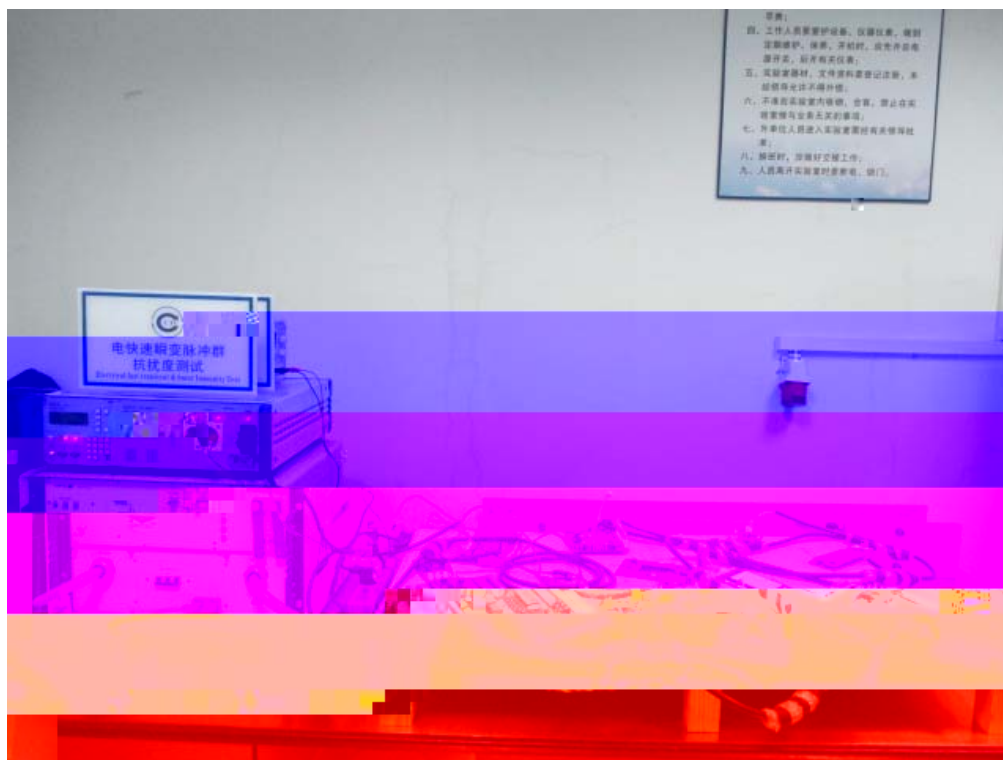

6. Surge Immunity Test

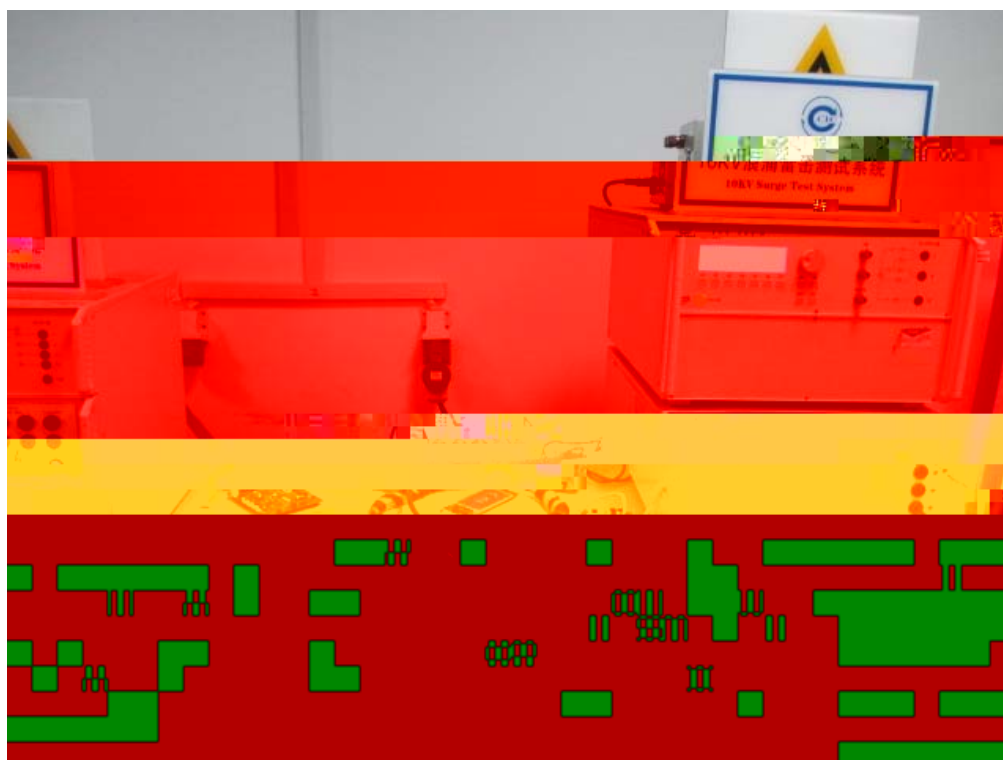

7. Immunity to Conducted Disturbances Induced by RF Fields

8. Power Frequency magnetic Field Immunity



STATEMENT

1. This test laboratory is accredited by CNAS, Accreditation Certificate No.L1659.
- 2.